


## EEM series

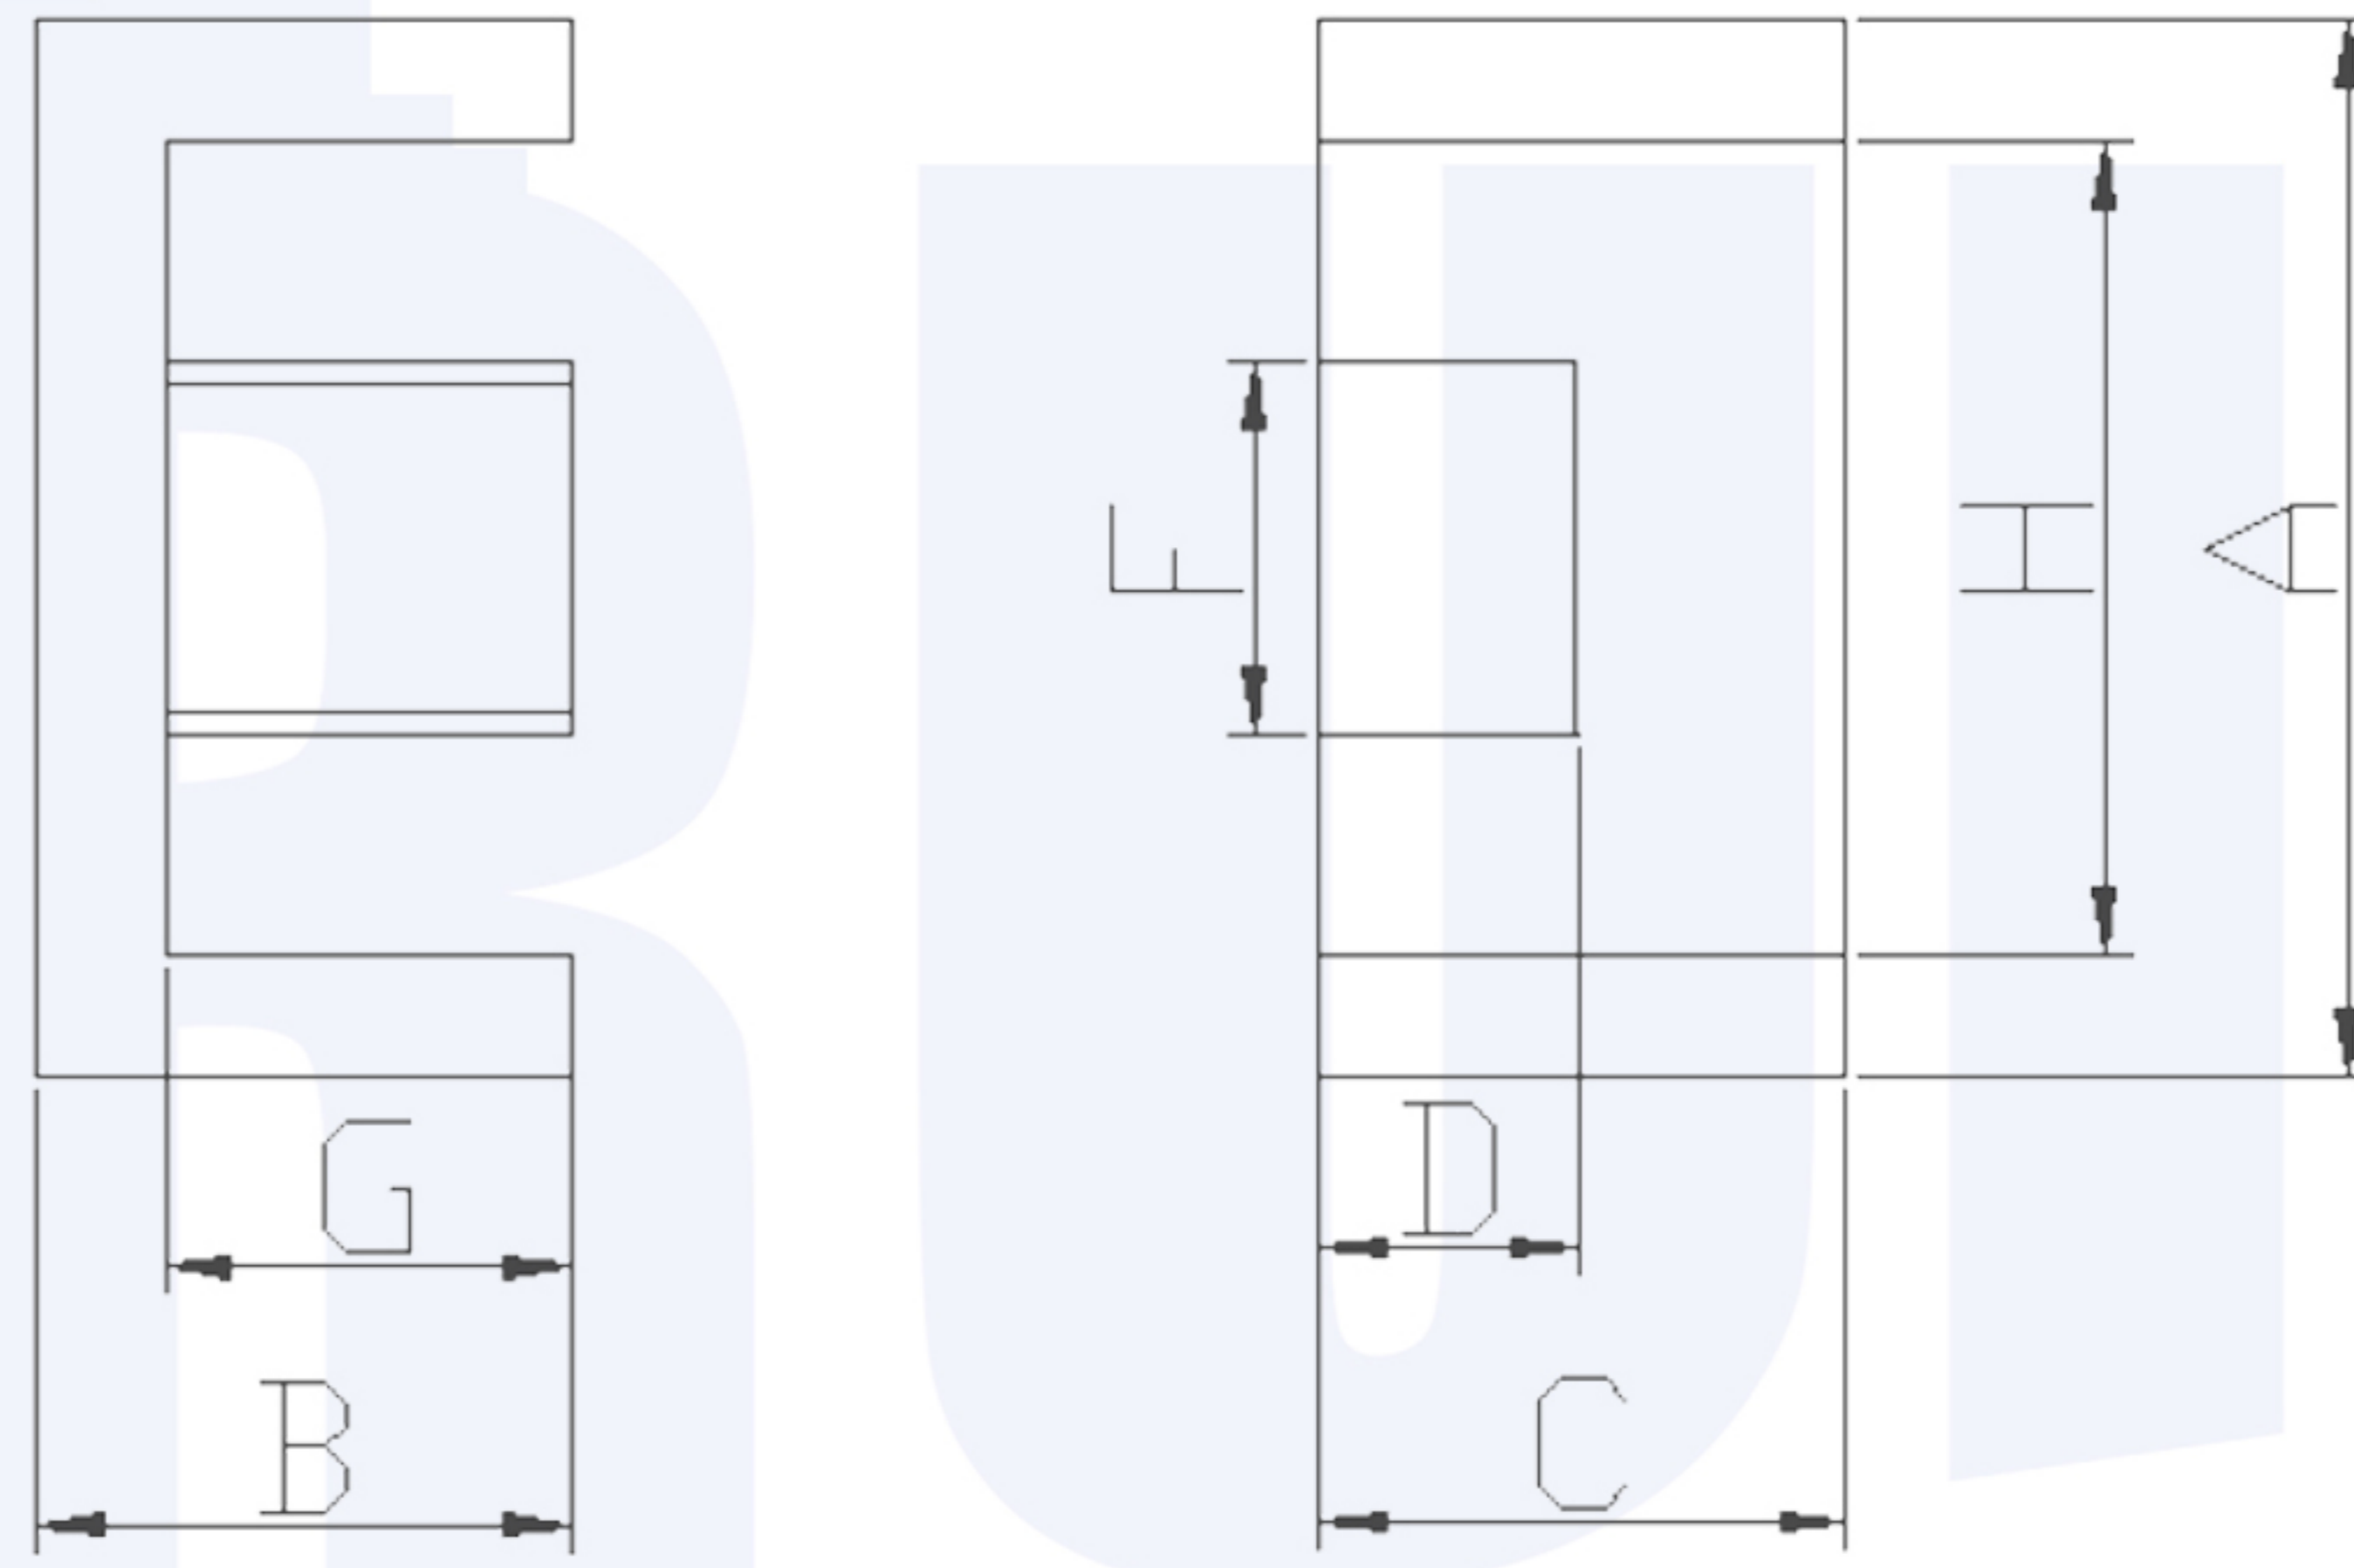

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm							Weight:g
	A	B	C	D	F	G	H	
EEM10.5	10.5±0.3	5.20±0.1	2.70±0.1	1.45±0.2	4.55±0.25	3.75±0.2	7.75±0.25	1.2
EEM12.7	12.7±0.3	6.85±0.2	3.5±0.2	2.0±0.2	5.4±0.25	4.55±0.2	9.0±0.25	1.6
EEM21	21.08±0.3	12.1±0.2	4.5±0.2	2.9±0.2	8.4±0.3	9.2±0.2	15.0±0.3	6.0
EEM25	25±0.75	12.6±0.2	12.45±0.25	8.3±0.3	8.8±0.25	9.55±0.25	19.2±0.4	21.0

TYPE	Effective parameter				AL (nH/N <sup>2</sup> ) (AL±25%)			
	C <sub>1</sub> (mm <sup>-1</sup> )	A <sub>e</sub> (mm <sup>2</sup> )	L <sub>e</sub> (mm)	V <sub>e</sub> (mm <sup>3</sup> )	SR-P4	SR-5P	SR-7P	SR-10P
EEM10.5	3.29	7.2	23.7	171	500			
EEM12.7	2.50	11.4	28.5	325	700			
EEM12.7	2.18	23.9	52.1	1245	1200			
EEM12.7	0.81	7.30	60.0	4300	3350			