


EF series

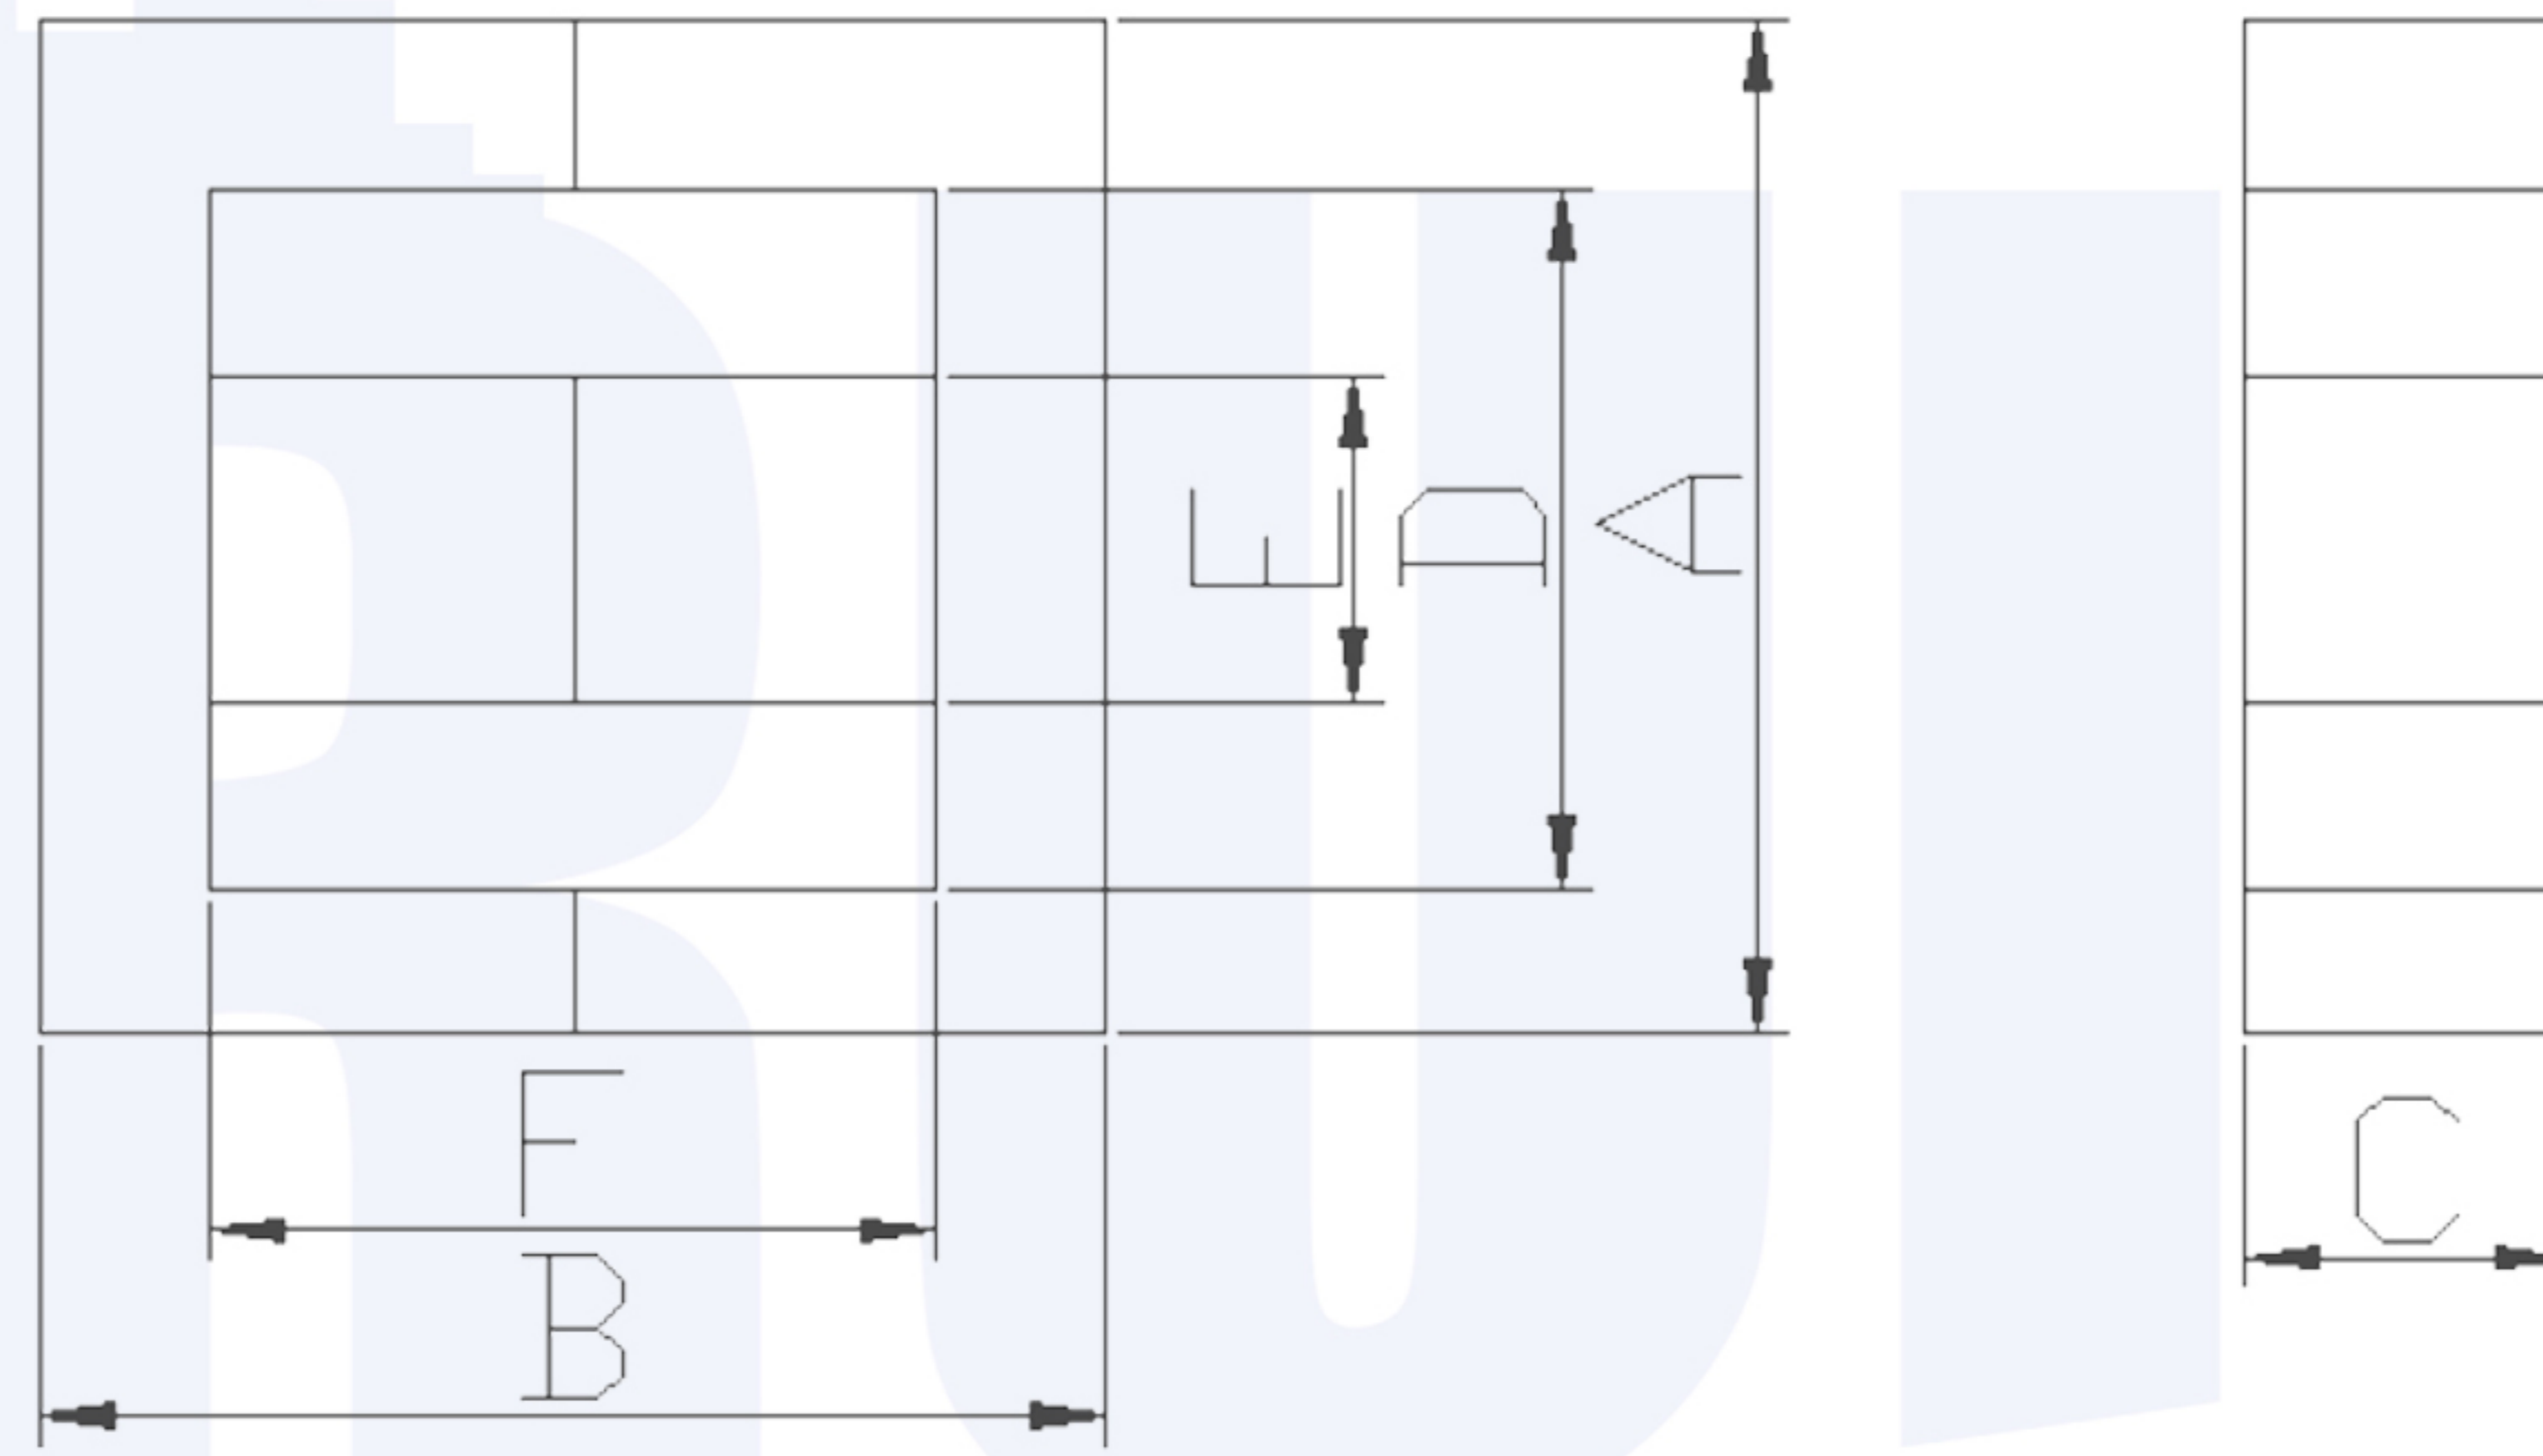

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm						Weight:g
	A	B	C	D	E	F	
EF12.6	12.7±0.4	12.8±0.4	3.60±0.2	8.80	3.65±0.15	9.30±0.3	2.8
EF16	16.10±0.6	16.10±0.4	4.50±0.2	11.30	4.55±0.15	11.80±0.4	3.6
EF20	20.0±0.5	19.80±0.5	5.65±0.3	14.10	5.70±0.30	14.40±0.5	7.3
EF20/11	20.0±0.4	20.0±0.4	11.0 ⁺⁰ _{-0.5}	14.10	5.70±0.30	14.40±0.5	13.9
EF25	25.05±0.75	25.10±0.5	7.20±0.3	17.50	7.20±0.25	17.80±0.4	16.0
EF25/11	25.05±0.5	25.10±0.5	10.75±0.3	17.50	7.20±0.3	17.80±0.4	24.4
EF32	32.0 ^{+0.9} _{-0.7}	32.8 ⁺⁰ _{-1.2}	9.5 ⁺⁰ _{-0.6}	22.7	9.5 ⁺⁰ _{-0.6}	22.4 ^{+0.6} ₋₀	30.0
EF36	36.0 ^{+1.0} _{-0.7}	36.0 ⁺⁰ _{-0.5}	11.5 ⁺⁰ _{-0.5}	24.5 ^{+1.2} ₋₀	10.2 ⁺⁰ _{-0.5}	24.0 ^{+0.6} ₋₀	50.0

SHIRUI

TYPE	Effective parameter				AL (nH/N ²) (AL±25%)			
	C ₁ (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	SR-P4	SR-5P	SR-7P	SR-10P
EF12.6	2.39	12.4	29.6	367	875			
EF16	1.87	20.1	37.6	756	1100			
EF20	1.34	33.5	44.9	1500	1350			
EF20/11	0.699	64.46	45.06	2904	2990			
EF25	1.11	52.5	57.8	3020	1800			
EF25/11	0.72	8.2	57.8	4695	3200			
EF32	0.89	83	74	6140	2300			
EF36	0.68	120	81	9670	30			