


EFD series

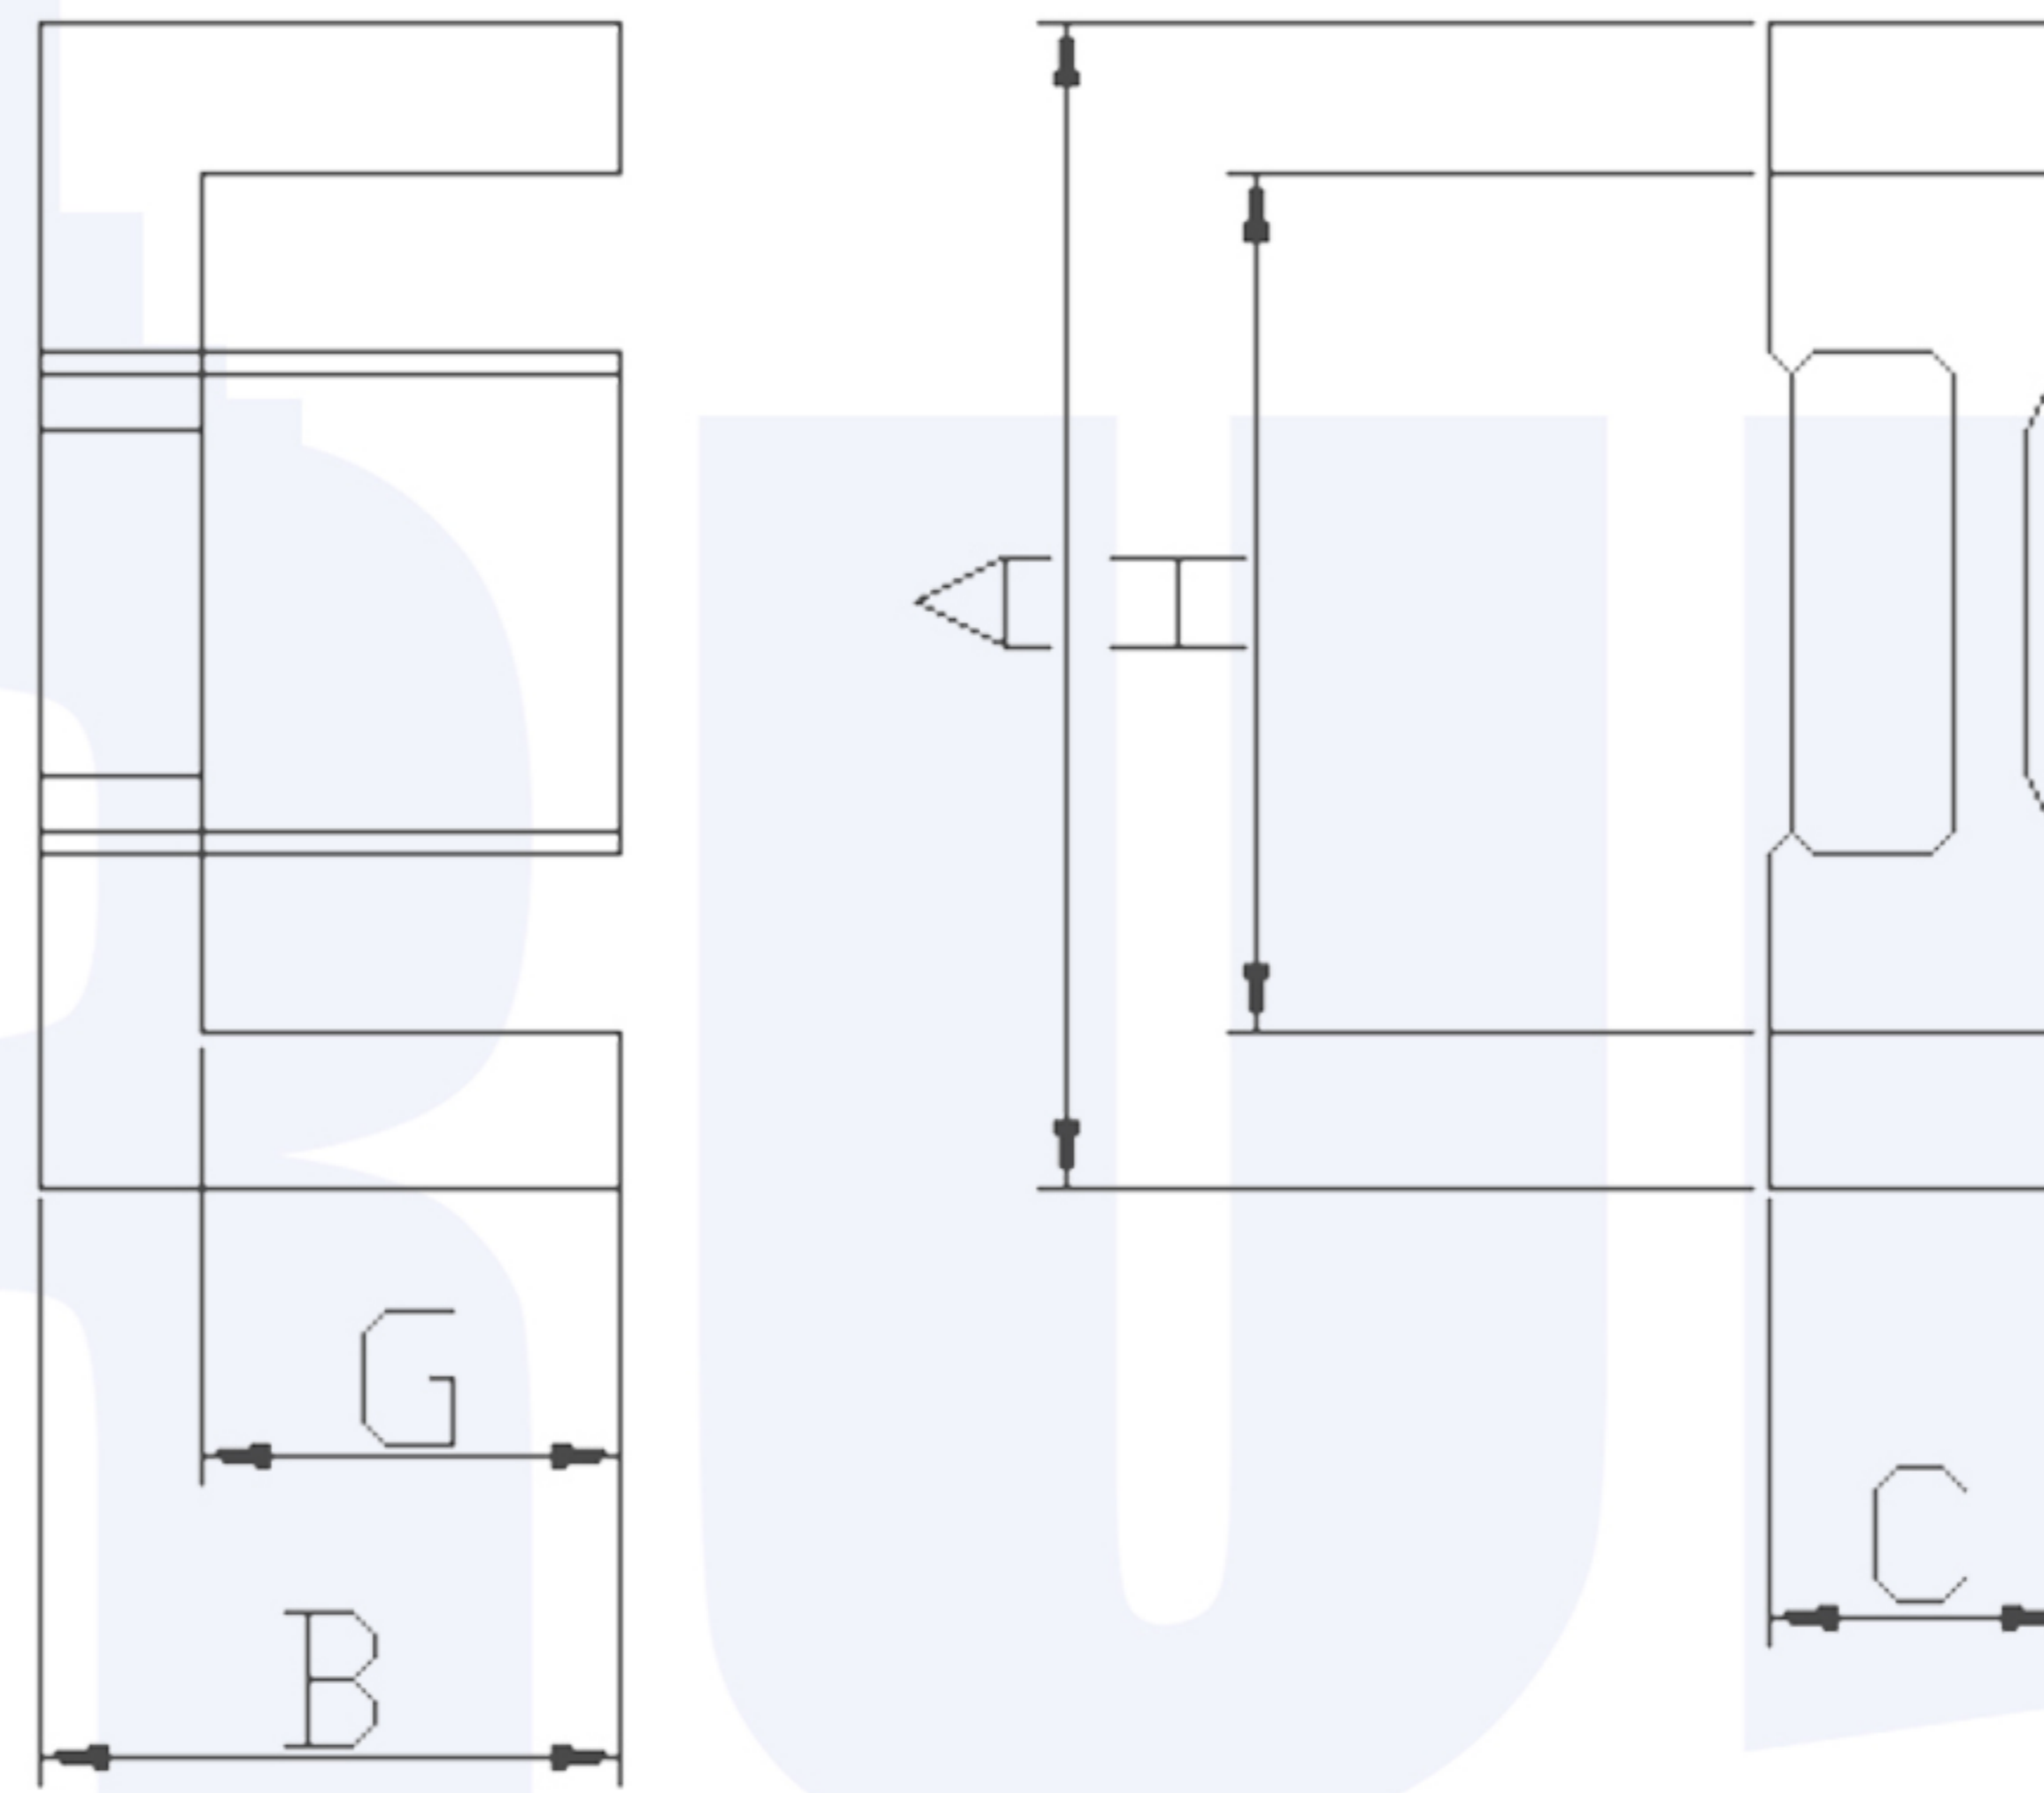


MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm							Weight:g
	A	B	C	D	F	G	H	
EFD10	10.5±0.3	5.20±0.1	2.70±0.1	1.45±0.2	4.55±0.25	3.75±0.2	7.75±0.25	0.91
EFD12	12.5±0.3	6.20±0.2	3.50±0.2	2.0±0.2	5.40±0.25	4.55±0.2	9.0±0.25	1.8
EFD13	13.2±0.3	6.60±0.2	4.60±0.2	2.05±0.2	5.60±0.25	4.5±0.2	10.7±0.25	1.6
EFD15	15.0±0.4	7.50±0.2	4.65±0.2	2.4±0.2	5.30±0.25	5.5±0.25	11.0±0.35	2.8
EFD17	16.9±0.3	7.60±0.2	5.50±0.2	2.9±0.2	7.30±0.15	5.6±0.15	13.2±0.34	3.3
EFD20	20±0.55	10.0±0.2	6.65±0.3	3.6±0.2	8.90±0.3	7.7±0.25	15.4±0.5	7
EFD20L	20±0.55	12.7±0.25	6.65±0.3	36.±0.2	8.90±0.3	10.45±0.25	15.4±0.5	7.9
EFD25	25±0.65	12.5±0.2	9.1±0.3	5.2±0.2	11.4±0.3	9.3±0.25	18.7±0.6	16
EFD30	30.0±0.8	15.0±0.2	9.1±0.3	4.9±0.25	14.6±0.4	11.2±0.3	22.4±0.75	24
EFD50	50.0±0.8	25.0±0.3	10.0±0.3	6.0±0.2	23.0±0.3	17.0±0.3	35.0±0.8	90

EFD series

SHIRUI

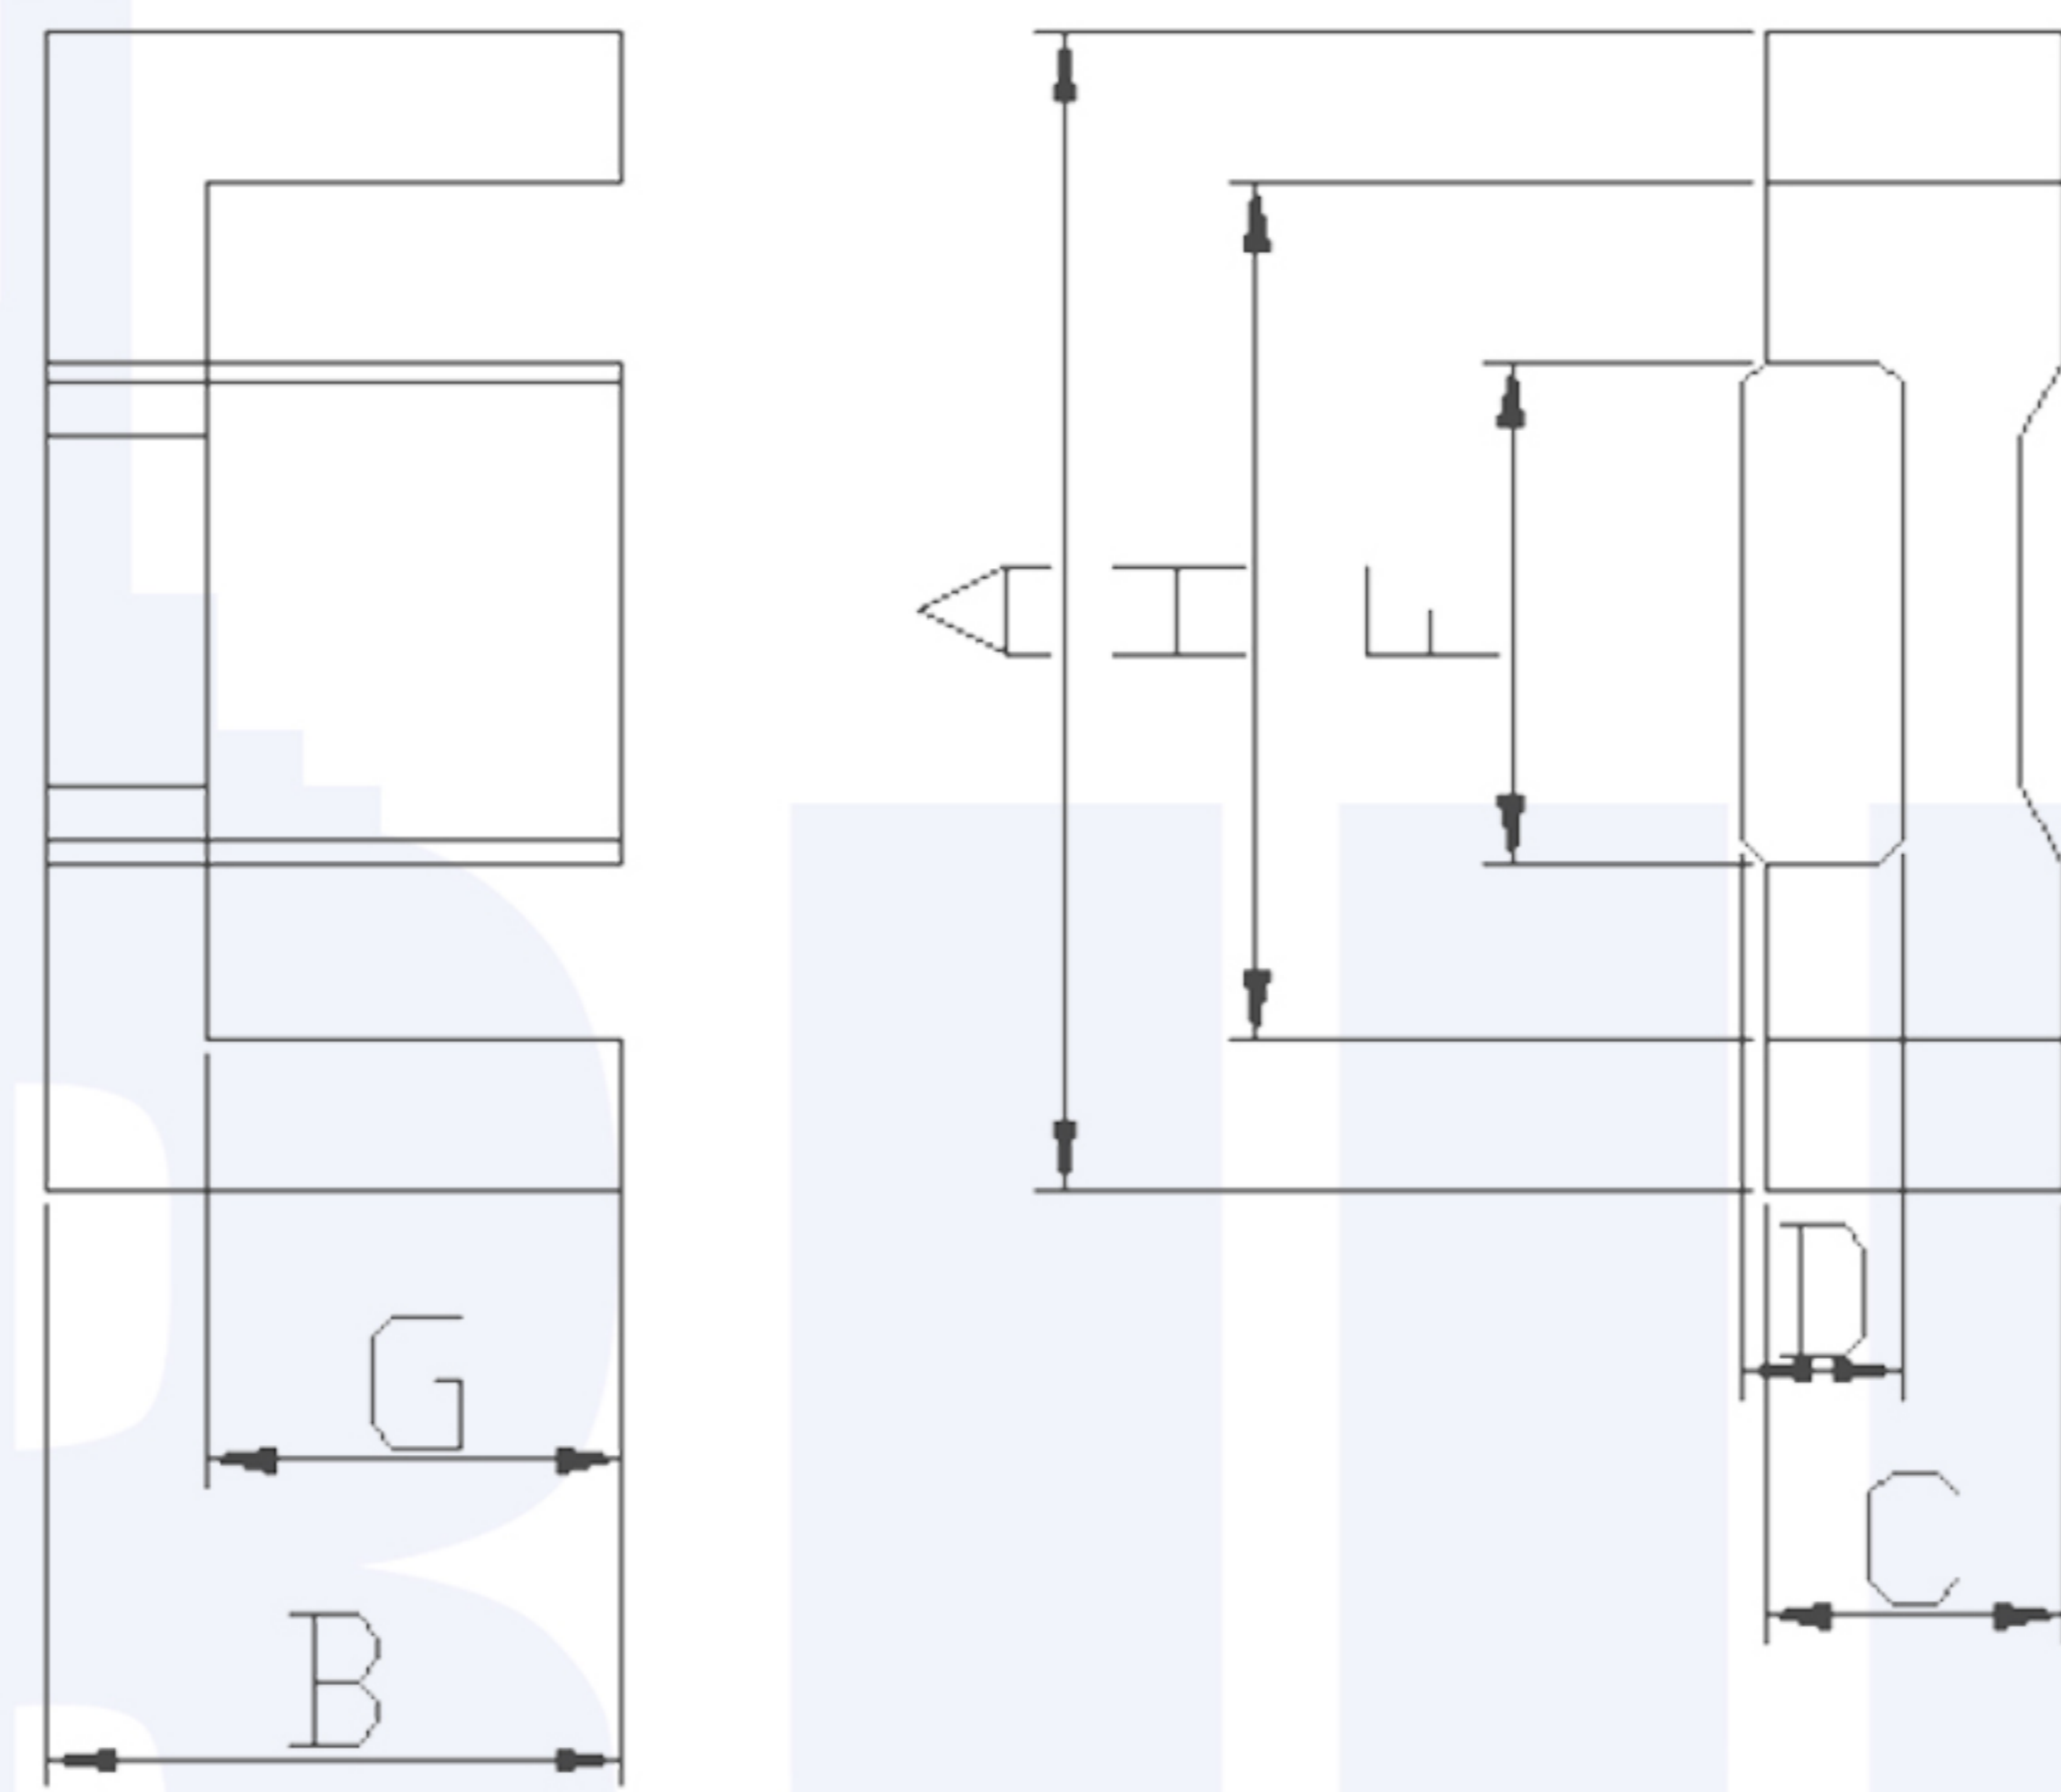

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Effective parameter				AL (nH/N ²) (AL±25%)			
	C ₁ (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	SR-P4	SR-5P	SR-7P	SR-10P
EFD10	3.29	7.2	23.7	171	560			
EFD12	2.50	11.4	28.5	325	800			
EFD13	3.01	9.80	29.5	289	700			
EFD15	2.27	15.0	34.0	510	700			
EFD17	1.77	20.0	35.4	708	1050			
EFD20	1.52	31.0	47.0	1460	1300			
EFD20L	1.85	33.0	61.2	2105	1050			
EFD25	1.00	58.0	57.0	3300	2000			
EFD30	0.98	69.0	68.0	4700	2100			
EFD50	0.68	151.5	103.3	15463	3900			