


ET & FT series

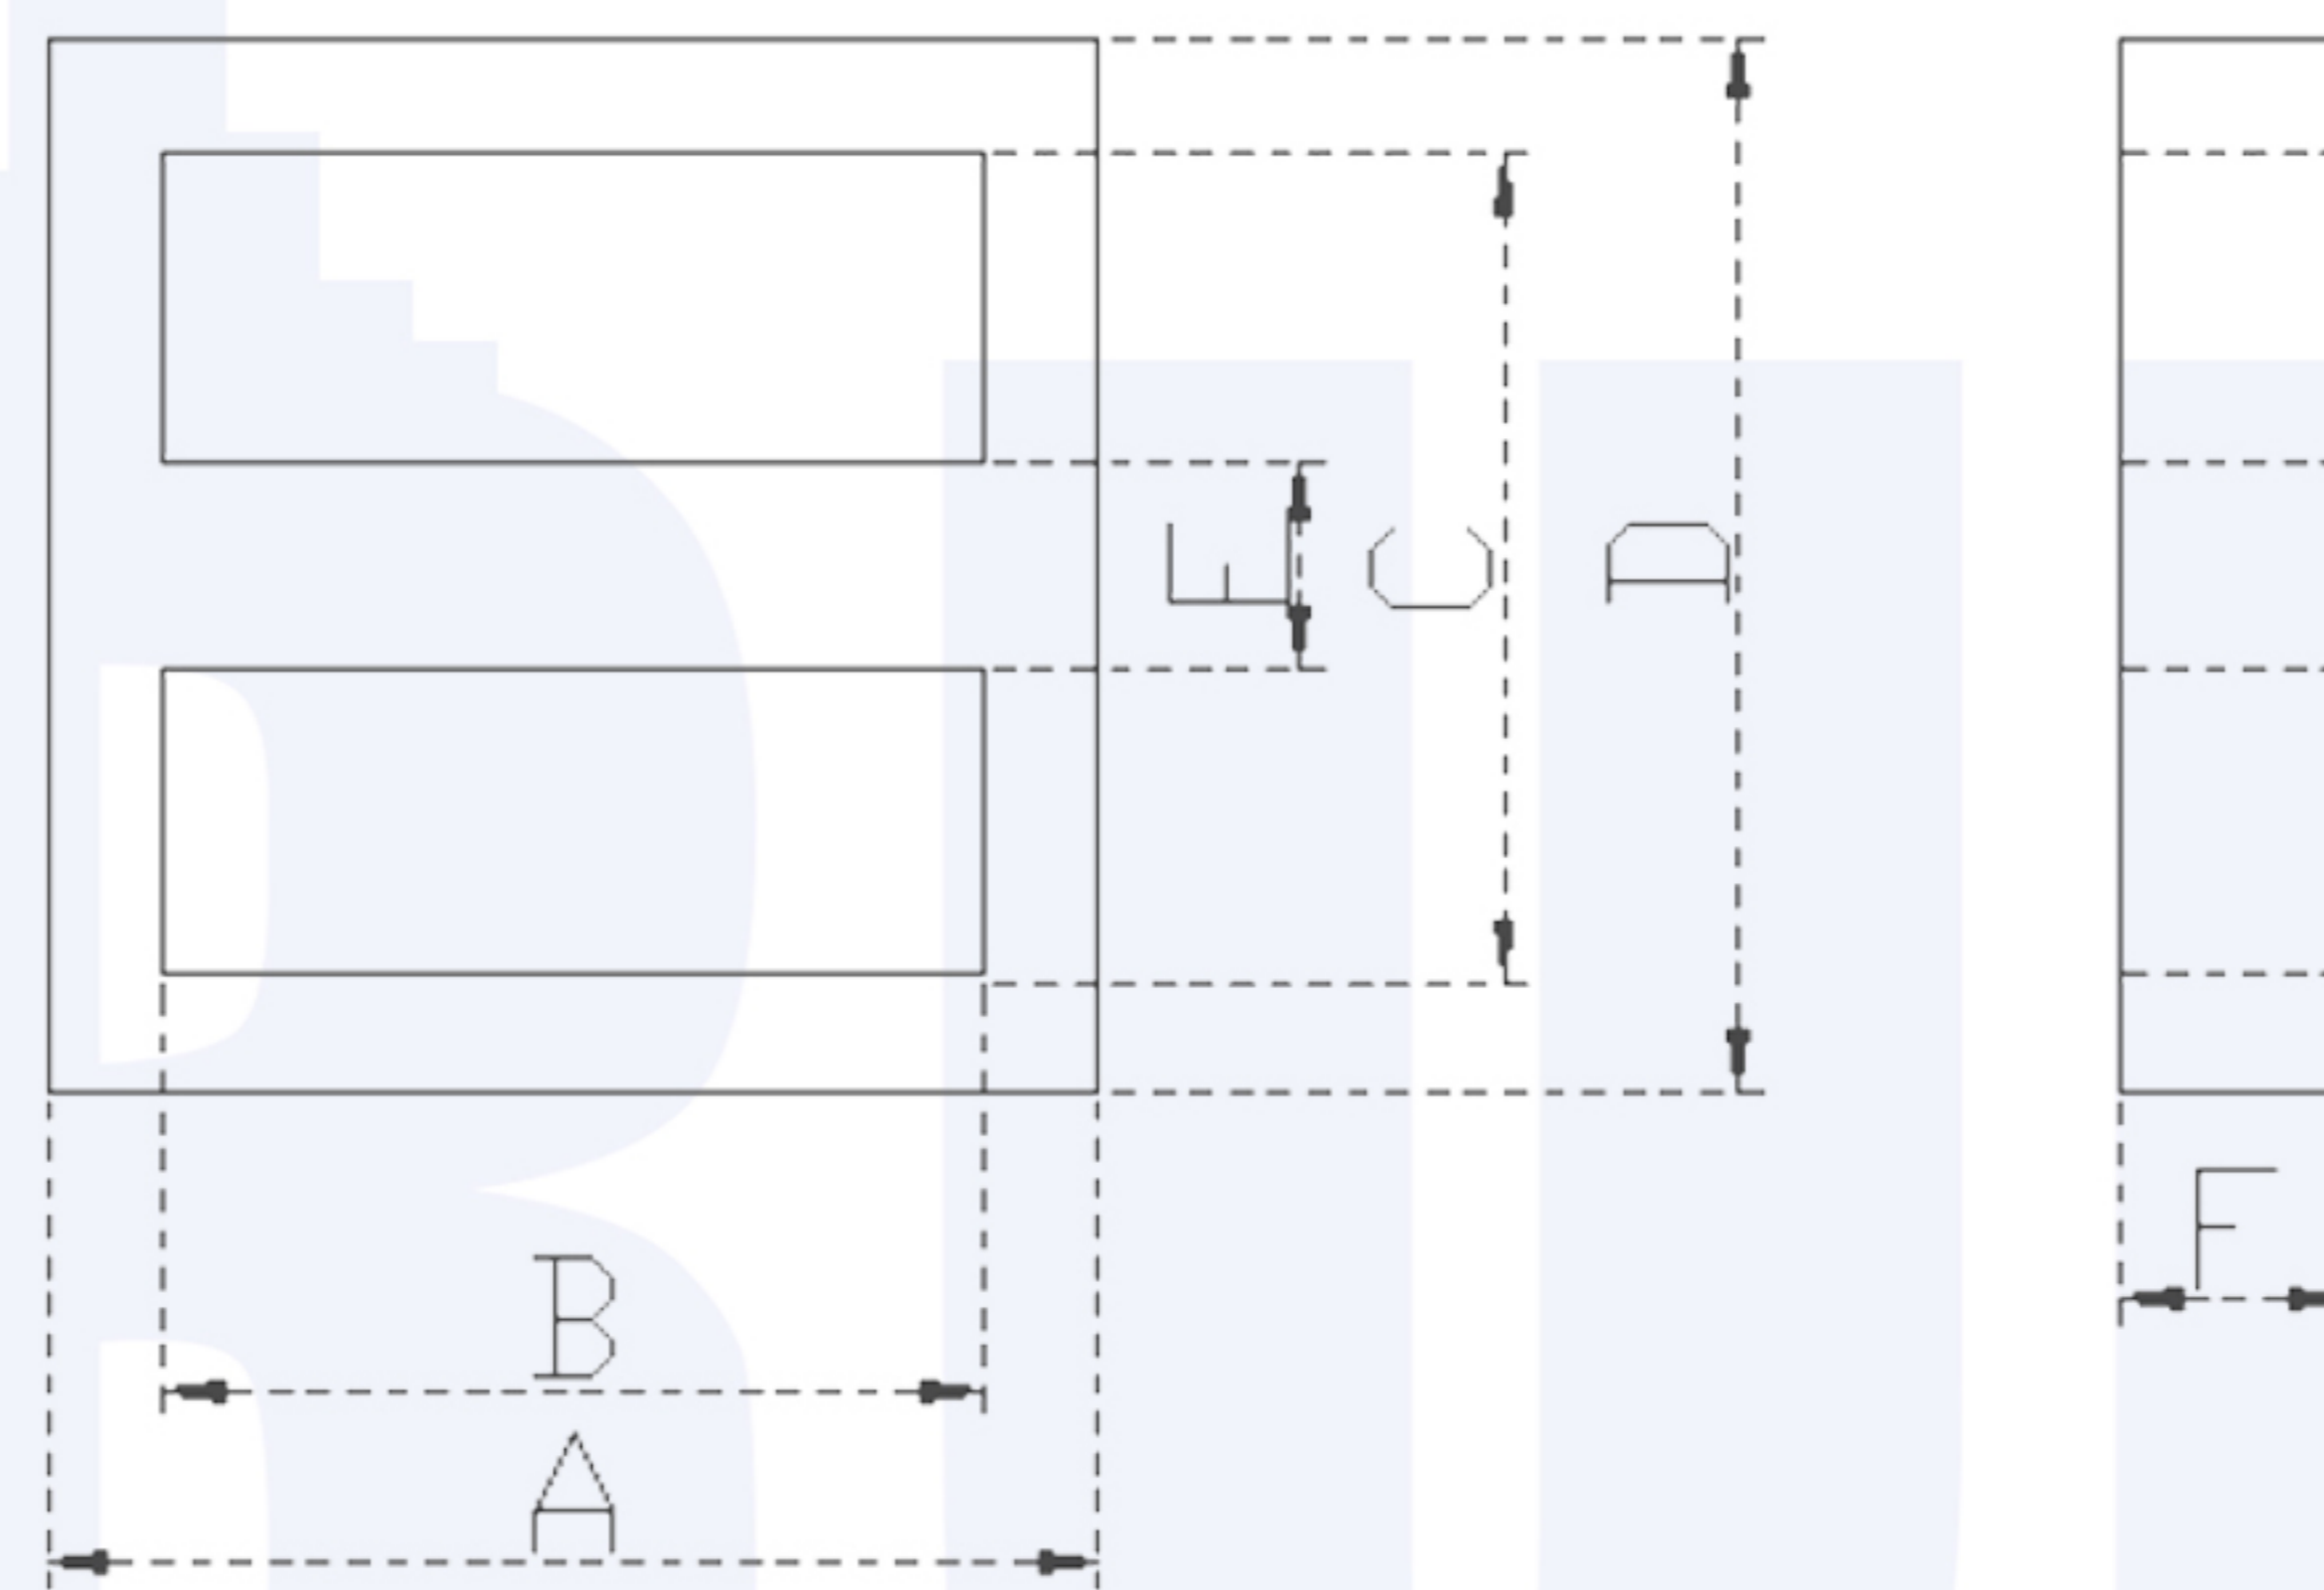

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm						Weight:g
	A	B	C	D	E	F	
ET20	20.3±0.5	15.8	15.8	20.3±0.5	4.0±0.3	4.4±0.3	4.5
ET24	24.2±0.5	18.9	18.8	24.2±0.5	4.0±0.3	4.0±0.3	5.3
ET25	25.5±0.5	19.2	19.2	25.5±0.5	5.0±0.3	5.0±0.3	8.5
ET28	28.45±0.7	21.8	22.2	28.45±0.7	5.0±0.3	5.0±0.3	10.1
ET35	35.3±0.7	26.8	26.5	35.3±0.7	7.5±0.3	7.5±0.3	26.0
FT20	20.6±0.6	15.7min	7.35min	14.1±0.25	4.1±0.2	4.6±0.2	3.8
FT25	25.6±0.4	19.3min	8.1min	17.6±0.3	3.4±0.15	5.2±0.25	6.5
FT30	30.0±0.4	22.4min	8.9min	19.8±0.3	4.2±0.15	6.4±0.25	10.9

TYPE	Effective parameter				AL (nH/N ²) (AL±25%)			
	C ₁ (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	SR-P4	SR-5P	SR-7P	SR-10P
ET20	29.6	17.6	52.1	917				
ET24	3.31	18.0	60.0	1098				
ET25	2.3	27.6	62.3	1721				
ET28	2.54	27.0	70.0	1972				
ET35	1.46	58.3	85.2	4970				
FT20	4.11	13.0	53.0	688				
FT25	3.77	18.0	68.0	1203				
FT30	2.85	27.0	77.0	2068				