


PM series

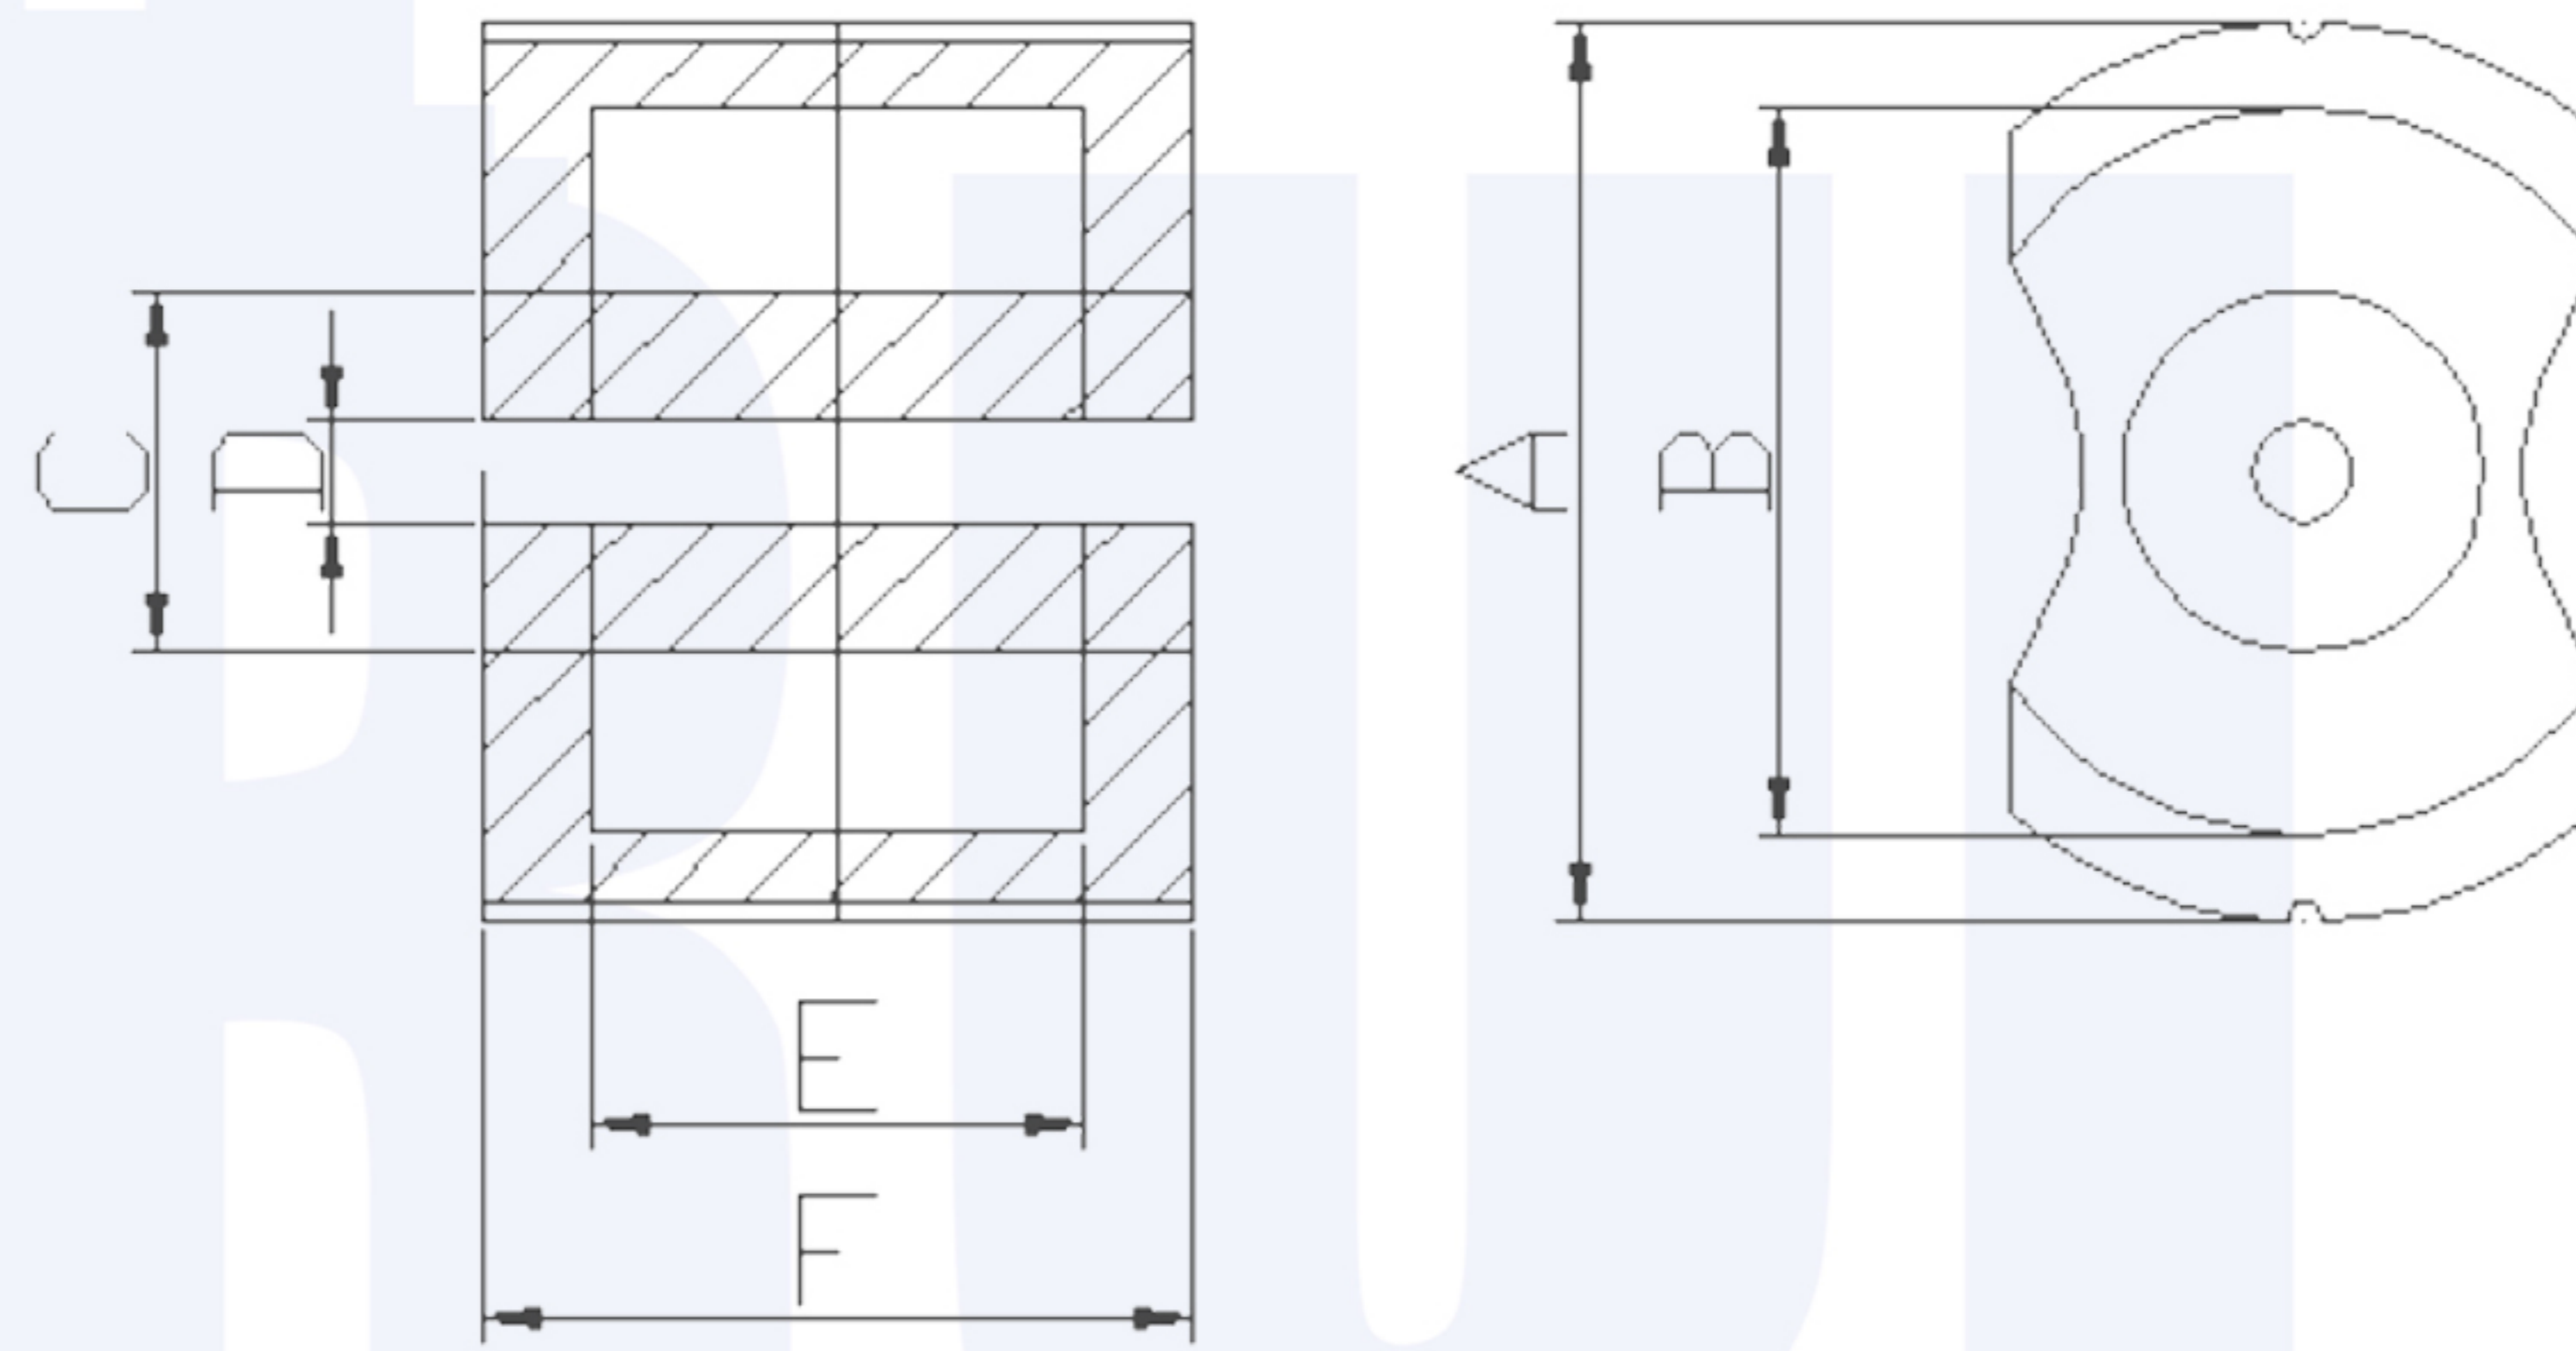

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm						Weight: g
	A	B	C	D	E	F	
PM50	49.15±0.85	39.65±0.65	19.7±0.3	5.5±1.0	26.8±0.4	38.8±0.2	140
PM62	61.0±1.0	48.0min	25.0±0.7	5.3±0.3	33.8±0.6	48.8±0.5	280
PM74	74.0±0.3	57.0min	29.0±1.0	5.4±0.3	41.0±0.8	59.0±0.6	460
PM87	87.0±0.3	66.5min	31.0±1.5	8.5±0.4	48.4±0.8	70.0±0.8	770
PM114	114.0±0.5	88.0min	42.0±1.5	5.4±0.4	63.8±0.8	92.5±0.5	1940

TYPE	Effective parameter				AL (nH/N ²) (AL±25%)			
	C ₁ (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	SR-P4	SR-5P	SR-7P	SR-10P
PM50	0.227	370	84	31000	7700			
PM62	0.190	570	109	62000	970			
PM74	0.162	790	128	10100	10000			
PM87	0.161	910	146	133000	13000			
PM114	0.116	1720	200	344000	16000			