


UF series

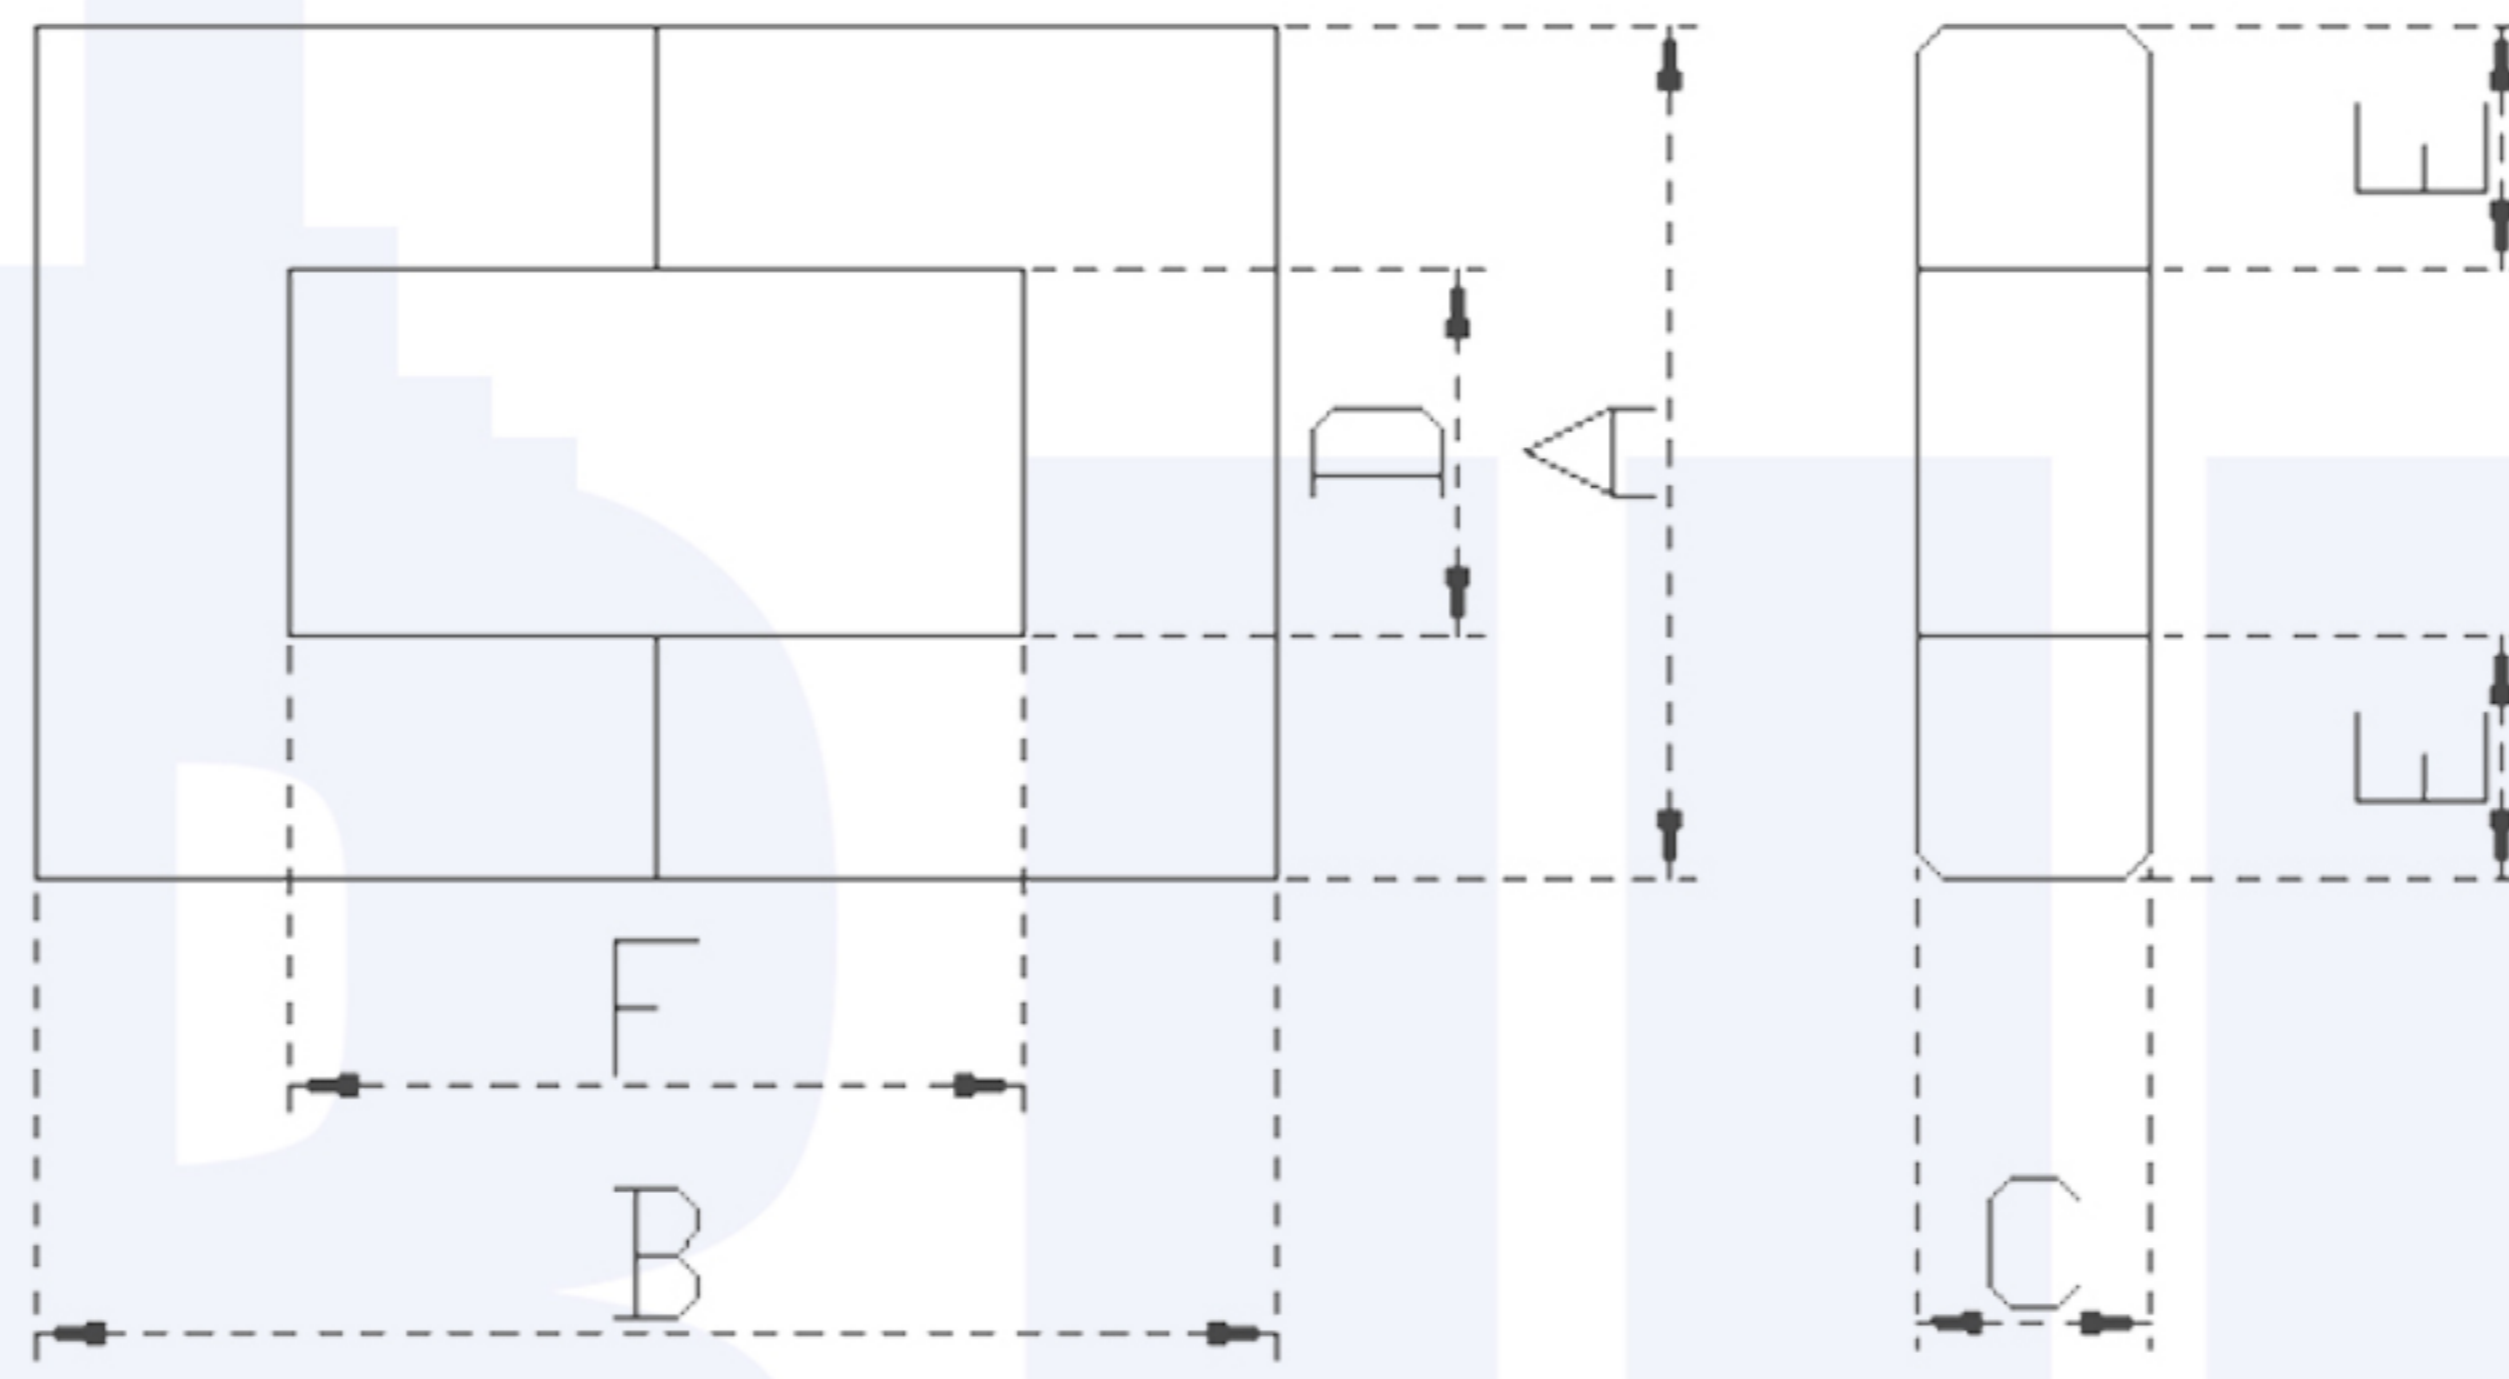

MATERIALS:SR-10P, SR-7P, SR-5P, SR-P4

TYPE	Dimension:mm						Weight:g
	A	B	C	D	E	F	
UF9.8	9.8±0.2	14.2±0.2	2.7±0.2	4.2±0.2	2.8±0.1	8.4±0.3	1.3
UF10.3	10.35max	15.0±0.3	2.93±0.12	4.05min	2.95±0.1	8.6±0.7	1.5
UF10.5	10.5±0.3	15.6±0.4	5.3±0.15	5.5±0.3	2.5±0.1	10.6±0.3	2.5
UF15	15.2±0.7	23.4±0.2	6.7±0.5	5.2±0.35	5.2±0.2	11.4±1.4	8.0
UF15.7	15.7±0.2	19.6±0.3	5.9±0.15	6.7±0.2	4.5±0.2	12.0±0.2	6.7
UF16	16.0±0.2	20.0±0.4	6.0±0.15	7.0±0.3	4.5±0.2	12.0±0.2	6.9
UF18	18.4±0.5	26.1±0.4	6.2±0.15	6.0±0.4	6.2±0.4	13.5±0.6	11.8
UF19	19.0±0.7	26.0±1.0	6.0±0.15	8.5±0.5	4.5±0.2	19.4±0.7	8.5
UF21	20.7±0.8	31.2±0.6	7.45±0.2	6.3±0.3	7.25±0.2	16.6±0.4	18.0

TYPE	Effective parameter				AL (nH/N ²) (AL±25%)			
	C ₁ (mm ⁻¹)	A _e (mm ²)	L _e (mm)	V _e (mm ³)	SR-P4	SR-5P	SR-7P	SR-10P
UF9.8	4.46	7.66	34.2	261.5			1000	
UF10.3	4.13	8.63	35.7	308			920	
UF10.5	3.02	13.3	40.0	530.7			1200	
UF15	1.55	32.6	50.5	1647			3000	
UF15.7	2.05	24.5	50.3	1232			2600	
UF16	1.97	25.9	51.0	1321			3300	
UF18	1.55	38.4	59.4	2284			4400	
UF19	2.64	25.0	66.0	1652			1870	
UF21	1.27	54.0	68.6	3700		4380		